



Product Datasheet

EZ-Go5



The EZ-Go5 is a high power outdoor 250mW wireless AP/Client Bridge / Router system operating in the 5GHz unlicensed frequency spectrum. It features adjustable channel size of 5MHz to 40MHz to provide for increased channel capacity or increased thruput. It complies with the 802.11a OFDM standards to insure interoperability. The EZ-Go[®] is housed in a UV resistant and UL rated weatherproof enclosure with a nice aesthetic appearance and clean lines. It includes an integrated 19dBi high efficiency VPOL antenna for extended range.

With its advanced software, the EZ-Go[®] supports multiple operating modes, including; Client Bridge, Client Router, Access Point Router, Access Point + WDS and Point to Point.

The EZ-Go[®] comes complete with Cat5e rated POE (Power Over Ethernet) power inserter and 18VDC auto-ranging power supply. The corrosion resistant bracket system accommodates pole or wall mounting. The unit supports an optional external antenna connector.

FEATURES	BENEFITS
High Power 250mW electronics and powerful 19dBi antenna.	Operation at long distances and high thruput
Advanced e-zynet Software	No driver needed. Easy configuration thru web interface and remotely. Multiple Operating Modes. Plug and Play installation. Antenna alignment utility. Bandwidth management. Data Logging and statistics graphing.
64 and 128bit WEP, WPA and WPA2 Encryption. 802.1x and RADIUS support.	Most powerful data security available
Seamless Roaming	Allows users to roam between access points without loss of connection
DHCP Client or Server	Simplifies network administration
MAC Address filtering	Ensures secure network connection in all operating modes
VOIP Friendly QOS	Quality Of Service mechanism to ensure good Voice Over IP performance
SNMP	Compatible with your favorite network management software
Power Over Ethernet (POE)	Antennas can be mounted up to 100meter (300') from the power source

EZ-Bridge[™] Network Expansion

EZ-Go[®] are compatible with the EZ-Bridge[™] wireless bridge systems and can be used to expand the network to multiple buildings

TECHNICAL SPECIFICATIONS

Data Rates

802.11a: 54 / 48 / 36 / 24 / 12 / 9 / 6 Mbps

Standards

IEEE802.11a, 802.3, 802.3u

Power Requirements

Power Supply: 100-240VAC 50/60Hz
EZ-Go[®]: 12VDC to 18VDC
Average Power Consumption: 5W

Regulatory Certifications

FCC Part 15 / UL

RF Frequency Band

5100 to 5850 MHz (ext 4900-6000 MHz)

Media Access Protocol

Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA)

Modulation Technology

Direct Sequence Spread Spectrum (DSSS)
OFDM (64QAM, 16QAM, QPSK, BPSK)

Operating Channel Size

5MHz, 10MHz, 20MHz, 40MHz

Receive Sensitivity (Typical)

-74dBm +/-1.5dBm @ 54 Mbps
-94dBm +/-1.5dBm @ 6 Mbps

Available Transmit Power

1dB steps, 8dB to 24dB

Antenna

19dBi Panel Antenna, 21deg Az and 10deg El Beamwidth, >23dB front to back. Vertical Polarity

Network Topology

Ad-Hoc, Infrastructure

Operation Modes

AP Client , AP Client Router, Wireless Access Point, Wireless Router, WDS, AP+WDS, Universal Repeater

Interface

10/100Mbps RJ-45 LAN Port

IP Auto Configuration

DHCP Client, DHCP Server

Security

Password Protection, MAC Address Filtering, WEP/WPA encryption, Hide SSID in beacons, Layer 2 isolation

Management Configuration

Web-based configuration (HTTP)
Console configuration (SSH)
SNMP Protocol

Firmware Upgrade

Upgrade firmware via web browser

Antenna Physical Dimensions (L x W x D)

314mm x 187mm x 65mm
12.4" x 7.3" x 2.5"

Complete System Weight


1.5 kg (3.3 lbs)

Temperature Range

Operating: -20°C to 70°C (-4°F to 158°F)
Storage: -40°C to 70°C (-40°F to 158°F)

Notes:

- All shipments F.O.B. Draper, UT 84020
- EZ-Go[™] carries a 1 year warranty

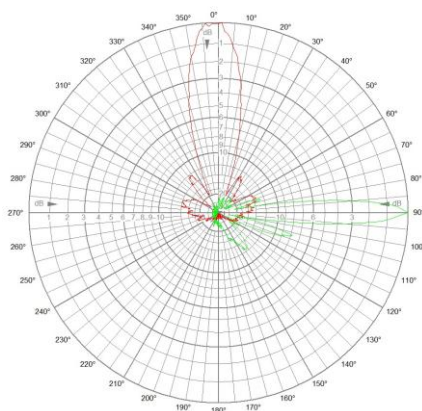

EZ-Go-5 19dBi Antenna Pattern

